


Deep groove ball bearings, single row, low-friction seal on both sides

Principal dimensions			Basic load ratings		Fatigue load limit P_u	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
10	35	11	8,52	3,4	0,143	50000	26000	0,053	6300-2RSL *

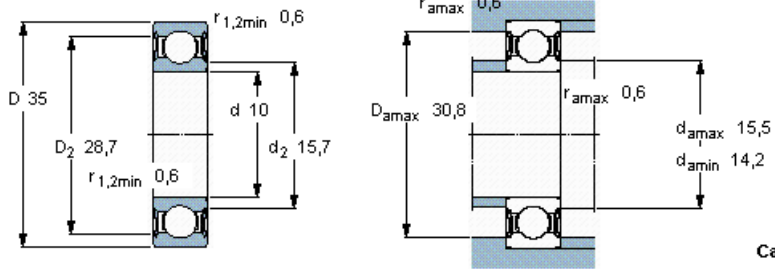

Calculation factors

k_r 0,03
 f_0 11