



## Deep groove ball bearings, single row, low-friction seal on both sides

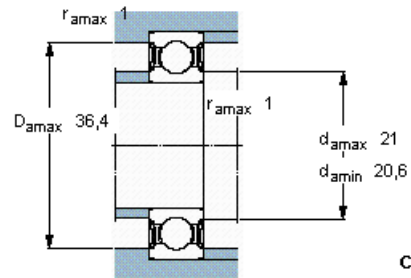

Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
15	42	13	11,9	5,4	0,228	38000	19000	0,082	6302-2RSL *



### Calculation factors

$k_r$  0,03  
 $f_0$  12