
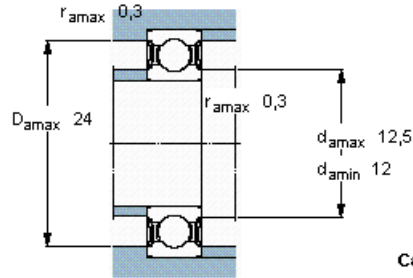


### Deep groove ball bearings, single row, low-friction seal on both sides

Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
10	26	8	4,75	1,96	0,083	67000	34000	0,019	6000-2RSL *



**Calculation factors**

$k_r = 0,025$   
 $f_0 = 12$