


## Deep groove ball bearings, single row, low-friction seal on both sides

Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
17	35	10	6,37	3,25	0,137	45000	22000	0,039	6003-2RSL *

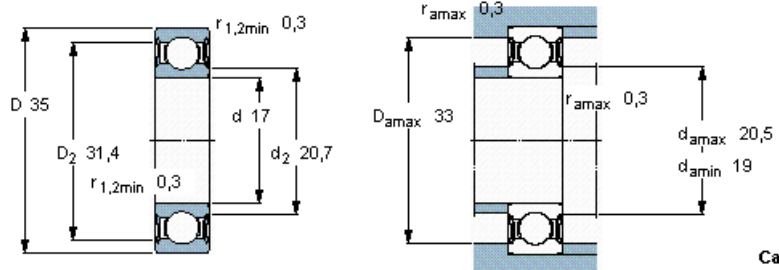

### Calculation factors

$k_r = 0,025$

$f_0 = 14$