



# Deep groove ball bearings, single row, low-friction seal on both sides

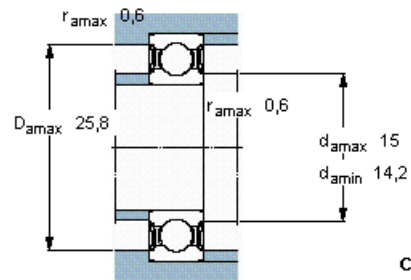

Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
10	30	9	5,4	2,36	0,1	56000	28000	0,032	6200-2RSL *



### Calculation factors

$k_r = 0,025$   
 $f_0 = 13$