
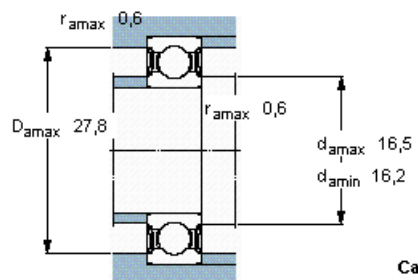


## Deep groove ball bearings, single row, low-friction seal on both sides

Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
12	32	10	7,28	3,1	0,132	50000	26000	0,037	6201-2RSL *



### Calculation factors

$k_r$  0,025

$f_0$  12