


# Deep groove ball bearings, single row, low-friction seal on both sides



Principal dimensions			Basic load ratings		Fatigue load limit $P_u$	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
25	52	15	14,8	7,8	0,335	28000	14000	0,13	6205-2RSL *

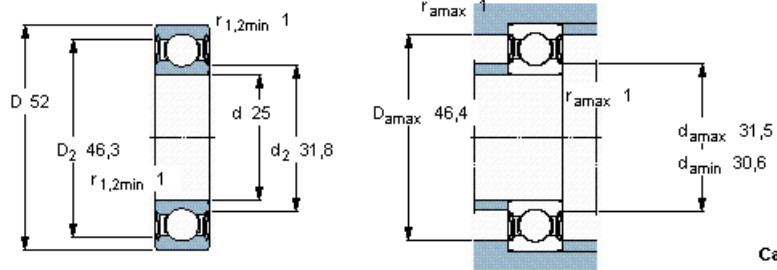

**Calculation factors**

$k_r$  0,025  
 $f_0$  14